

## 5 GHz, 13 dBi, H/V Dual Polarization Omni Antenna with Integrated Large Radio Case

### KPPA-5GHZ-DPOMA-WC-3



#### Features

- 5.1 – 5.9 GHz, 13 dBi gain with Horizontal/Vertical Polarization
- 360 degree of coverage with no null zones
- Powder-coated metal case protects your RF connections, minimizing need for tape
- Out performs our competitors by 1 to 3 dBi
- Will not require a RF shield if using a UBNT radio.
- Functional easy-to-install mounting bracket
- 2 x 2 MIMO – Multiple Input and Multiple-Output
- Cost effective all-in-one Omni Antenna solution with radio casing attached
- 2 x N-type Female Right Angle to RP-SMA Female Straight LMR200 cables of 6" length

#### Applications

- Wireless MIMO LAN systems & IEEE 802.11b/g/n/ax
- Public safety U-NII-1, 2, 3, and 4 (5.15-5.925 GHz)
- Mobile WiMAX Wireless Internet Provider "cell" sites
- Point-to-multipoint (PtMP) requiring 360 degree of coverage
- Cost-sensitive low-density deployments

#### Description

Includes powder-coated metal case that provides additional environmental protection and RF shielding for popular access point 2x2 MIMO radios in the 5GHz band  
 UV-resistant radome, anodized aluminium base, and heavy-duty hardware for all-weather operation  
 IEEE 802.11a/n applications for Hospitality, Industrial, Municipality, MTU/MD, WiMax, WISP, WiFi, Communication

#### Configuration

Design	Omni
Application Band	5 GHz
Band Type	Single
Radiation Pattern	Omni Directional
Polarization	Vertical/Horizontal
Connector Type	N Female
Number of Ports	2
Housing Material and Plating	Powder Coat

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	5.15		5.9	GHz
Input VSWR		1.5:1	1:1	
Impedance		50		Ohms
Gain	12		16	dBi
Electrical Downtilt		2		Degrees
Cross Polarization Ratio	20			dB
Horizontal (Azimuth) HPBW		Omnidirectional		
Vertical (Elevation) HPBW		6.5		Degrees
Input Power			100	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[5 GHz, 13 dBi, H/V Dual Polarization Omni Antenna with Integrated Large Radio Case KPPA-5GHZ-DPOMA-WC-3](#)

## 5 GHz, 13 dBi, H/V Dual Polarization Omni Antenna with Integrated Large Radio Case

### KPPA-5GHZ-DPOMA-WC-3



Electrical Specification Notes:  
Max input power is 100W per port.

#### Mechanical Specifications

Radome Material	PVC
Housing Plating/Color	Powder Coat
<b>Size</b>	
Length	36 in [914.4 mm]
Width	8 in [203.2 mm]
Height	6 in [152.4 mm]
Mounting Mast Diameter	1.6 to 2.4 in [40.64 to 60.96 mm]
Weight	9 lbs [4.08 kg]
Mechanical Specification Notes:	
Radome material is UV resistant PVC.	
Comes with metal case for PMP2000 radio.	

#### Environmental Specifications

<b>Temperature</b>	
Operating Range	-40 to +65 deg C
Wind Survivability	130 MPH [209.21 KPH]

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[5 GHz, 13 dBi, H/V Dual Polarization Omni Antenna with Integrated Large Radio Case KPPA-5GHZ-DPOMA-WC-3](#)

5 GHz, 13 dBi, H/V Dual Polarization Omni  
Antenna with Integrated Large Radio Case

**KPPA-5GHZ-DPOMA-WC-3**




Typical Radiation Pattern

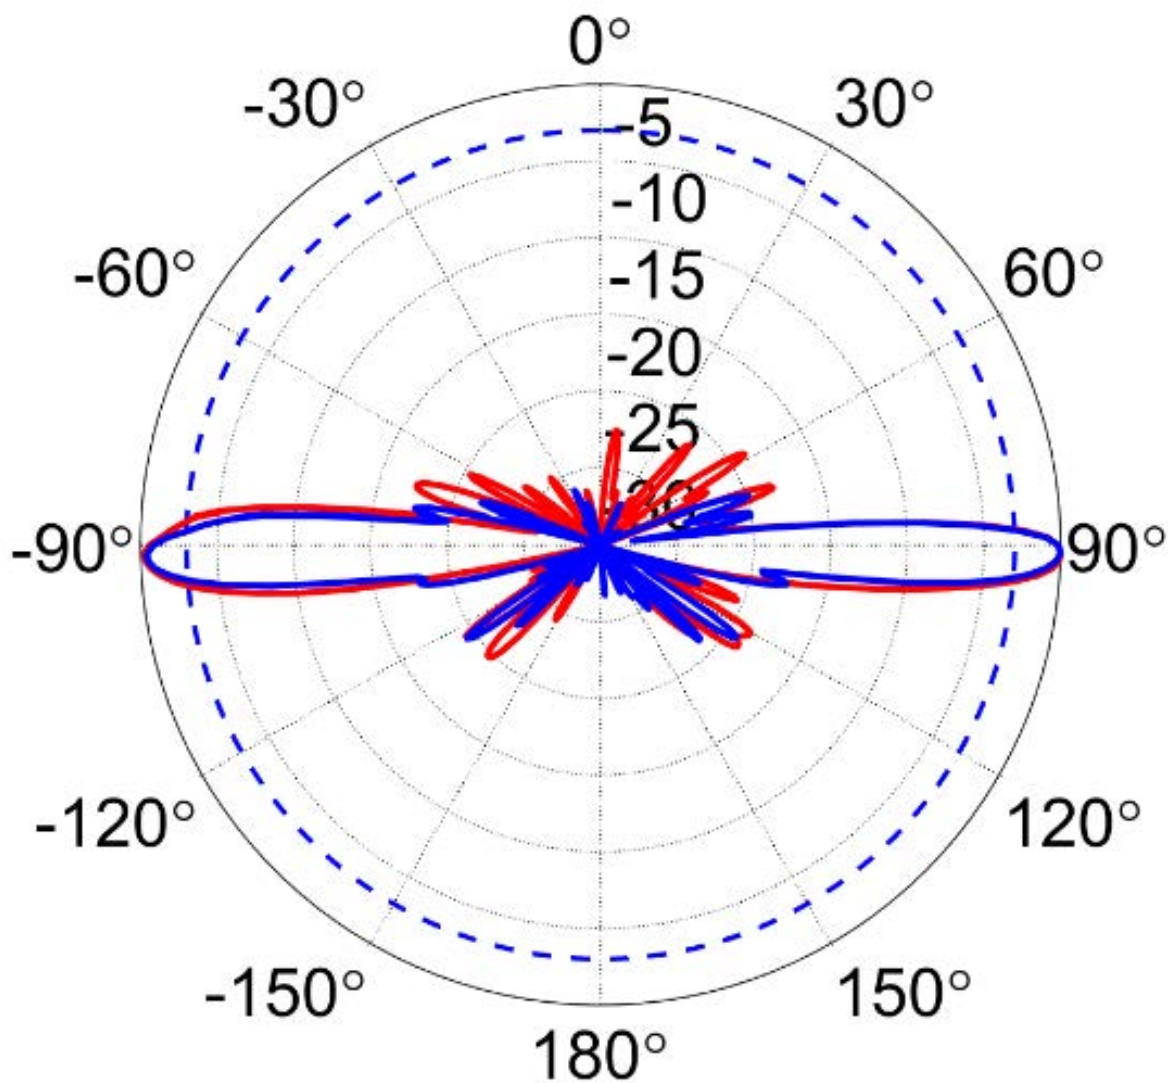

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[5 GHz, 13 dBi, H/V Dual Polarization Omni Antenna with Integrated Large Radio Case KPPA-5GHZ-DPOMA-WC-3](#)

5 GHz, 13 dBi, H/V Dual Polarization Omni  
Antenna with Integrated Large Radio Case

**KPPA-5GHZ-DPOMA-WC-3**

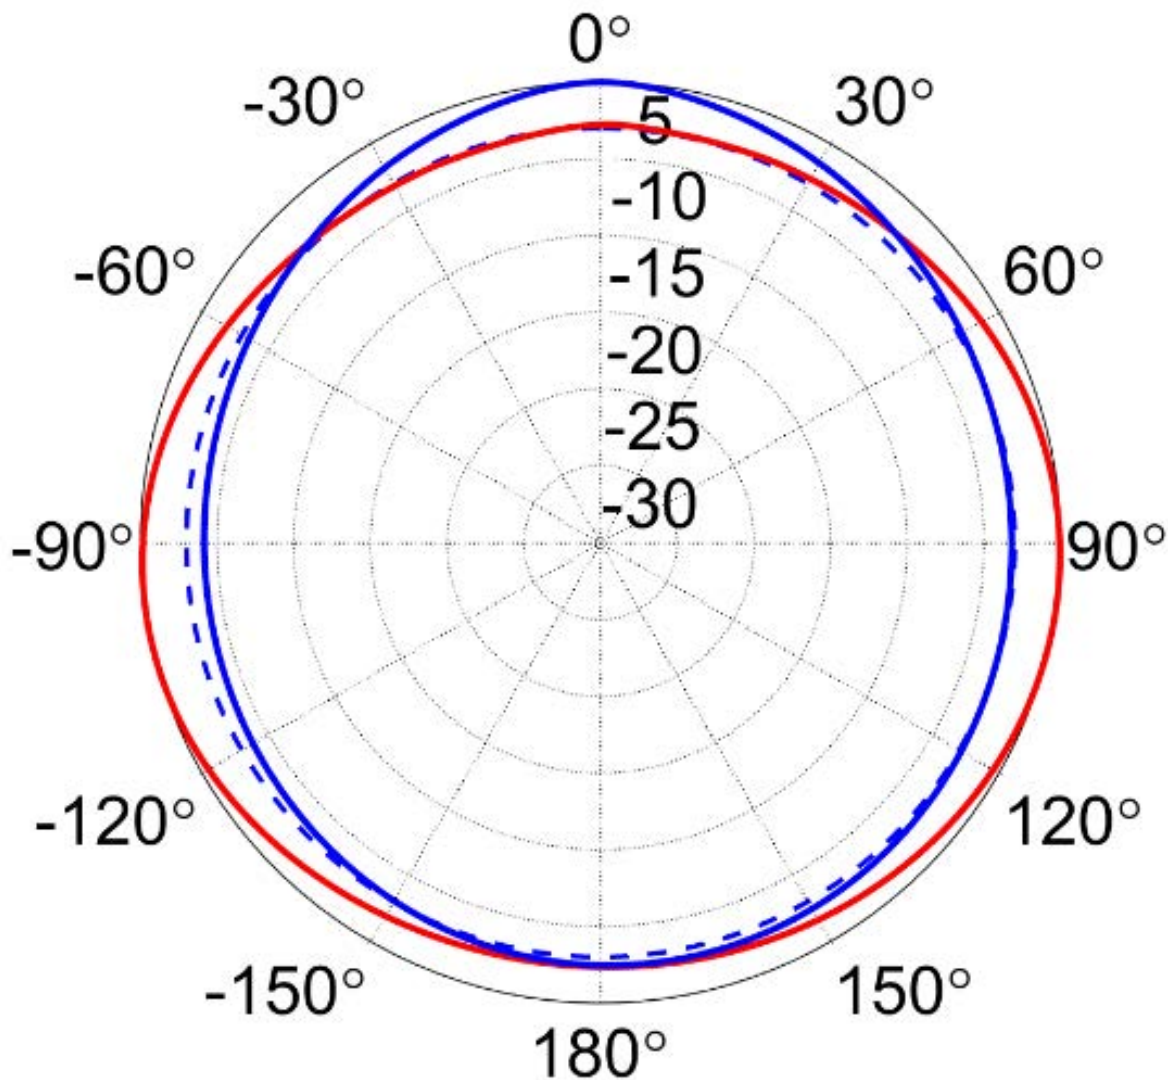

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:  
[5 GHz, 13 dBi, H/V Dual Polarization Omni Antenna with Integrated Large Radio Case KPPA-5GHZ-DPOMA-WC-3](#)

## 5 GHz, 13 dBi, H/V Dual Polarization Omni Antenna with Integrated Large Radio Case

### KPPA-5GHZ-DPOMA-WC-3



### Appendix

**Electrical Downtilt:** Angle in the antenna's elevation pattern in which the maximum gain occurs.

**Gain:** Antenna's average gain.

**Front to Back Ratio @ 180°±30°:** Average difference between the antenna's maximum gain and the maximum gain in the antenna's back lobe over ±30° angles.

**Cross-polarization Ratio (dB):** Typical difference between the co-polarization and cross-polarization gain across the sector's 3 dB Beam Width.

Dedicated to serving the needs of the Wireless Internet Service Provider (WISP) market, KP Performance Antennas offers purpose built products that reliably perform in the field. KP Performance Antennas product line consists of Yagi, Grid, Omni, Dish and other style antennas that operate in the 900 MHz, 2.4 GHz, 3 GHz, and 5 GHz frequencies.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [5 GHz, 13 dBi, H/V Dual Polarization Omni Antenna with Integrated Large Radio Case KPPA-5GHZ-DPOMA-WC-3](#)

URL: <https://www.kpperformance.com/5ghz-13-dbi-h-v-dual-pol-omni-antenna-large-case-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. KP Performance reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. KP Performance does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and KP Performance does not assume liability arising out of the use of any part or document.

KPPA-5GHZ-DPOMA-WC-3 CAD Drawing

